

(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property
Organization
International Bureau



(43) International Publication Date
7 July 2005 (07.07.2005)

PCT

(10) International Publication Number
WO 2005/060365 A2

(51) International Patent Classification: Not classified

(21) International Application Number:
PCT/US2003/037110

(22) International Filing Date:
20 November 2003 (20.11.2003)

(25) Filing Language: English

(26) Publication Language: English

(71) Applicant (*for all designated States except US*): **SHER-
WOOD SERVICES AG** [CH/CH]; Bahnhofstrasse 29,
CH-8200 Schaffhausen (CH).

(72) Inventors; and

(75) Inventors/Applicants (*for US only*): **SARTOR, Joe, Don**
[US/US]; 1036 Katy Lane, Longmont, CO 80504-7326
(US). **HUSEMAN, Mark, Joseph** [US/US]; 1170 Sage
Street, Broomfield, CO 80020 (US).

(74) Agent: **DENNINGER, Douglas, E.**; Tyco Healthcare
Group LP, 150 Glover Avenue, Norwalk, CT 06850 (US).

(81) Designated States (*national*): AE, AG, AL, AM, AT, AU,
AZ, BA, BB, BG, BR, BY, BZ, CA, CH, CN, CO, CR, CU,
CZ, DE, DK, DM, DZ, EC, EE, ES, FI, GB, GD, GE, GH,
GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC,
LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW,
MX, MZ, NI, NO, NZ, OM, PG, PH, PL, PT, RO, RU, SC,
SD, SE, SG, SK, SL, SY, TJ, TM, TN, TR, TT, TZ, UA,
UG, US, UZ, VC, VN, YU, ZA, ZM, ZW.

(84) Designated States (*regional*): ARIPO patent (BW, GH,
GM, KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZM, ZW),
Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM),
European patent (AT, BE, BG, CH, CY, CZ, DE, DK, EE,
ES, FI, FR, GB, GR, HU, IE, IT, LU, MC, NL, PT, RO, SE,
SI, SK, TR), OAPI patent (BF, BJ, CF, CG, CI, CM, GA,
GN, GQ, GW, ML, MR, NE, SN, TD, TG).

Published:

— *without international search report and to be republished
upon receipt of that report*

*For two-letter codes and other abbreviations, refer to the "Guid-
ance Notes on Codes and Abbreviations" appearing at the begin-
ning of each regular issue of the PCT Gazette.*

(54) Title: CONNECTOR SYSTEMS FOR ELECTROSURGICAL GENERATOR

(57) Abstract: A connector system for coupling electrosurgical instruments to electrosurgical generators is provided. The connector system includes a plug portion connectable to an electrosurgical instrument, the plug portion of the electrosurgical instrument having a shape specific to a particular manufacturer; and a plug receptacle portion supported on the electrosurgical generator; the plug receptacle portion being shaped to receive the plug portion of the electrosurgical instrument of the particular manufacturer and the plug portion of the electrosurgical instrument of any other manufacturer.



WO 2005/060365 A2

PATENT APPLICATION

Attorney Docket: 2932 (203-3756 PCT)**CONNECTOR SYSTEMS FOR ELECTROSURGICAL GENERATOR**

5

BACKGROUND1. Technical Field

10 The present disclosure relates to electrosurgical instrument systems and, more particularly, to connector systems for selectively connecting electrosurgical instruments and electrosurgical generators to one another.

2. Background

15 Electrosurgical instrument systems have become widely used by surgeons in recent years. Accordingly, a need has developed for equipment that is easy to handle and operate, is reliable and is safe. By and large, most electrosurgical instrument systems typically include a hand-held electrosurgical instrument or pencil electrically connected to a source of electrosurgical energy (e.g., an electrosurgical generator). The electrosurgical instrument transfers
20 radio-frequency (RF) electrical energy to a tissue site. The electrosurgical energy is returned to the electrosurgical generator via a return electrode pad positioned under a patient (i.e., a monopolar system configuration) or a smaller return electrode positionable in bodily contact with or immediately adjacent to the surgical site (i.e., a bipolar system configuration). The waveforms produced
25 by the electrosurgical generator yield a predetermined electrosurgical effect known generally as electrosurgical fulguration.

Recently, electrosurgical instrument systems have been increasingly provided with coupling and/or connecting systems (e.g., a plug) for removably connecting the electrosurgical instrument to the electrosurgical generator.
30 Typically, the electrosurgical instrument is provided with a so called "male" connector while the electrosurgical generator is provided with the corresponding "female" connector.

Since electrosurgery requires controlled application of radio frequency energy to an operative tissue site, it is important that the appropriate electrosurgical generator be correctly and/or properly mated with the electrosurgical instrument for the specific electrosurgical procedure. Due to the
5 variety of operative, electrosurgical procedures, requiring various levels of radio frequency energy delivery from an attached instrument, issues arise with the mismatching of electrosurgical instruments and electrosurgical generators.

Accordingly, a need exists for a connecting system, for electrosurgical generators which allow various surgical instruments to be selectively connected
10 to corresponding electrosurgical generators.

SUMMARY

The present disclosure relates to connector systems for connecting an
15 electrosurgical instrument to an electrosurgical generator. According to one particularly advantageous embodiment of the present disclosure, the connector system includes a plug portion connected to the electrosurgical instrument and including a profile or shape which is selectively mateable with a plug receptacle portion. Advantageously, the plug receptacle portion is retained in the
20 electrosurgical generator and is backward compatible, i.e., able to receive both old flying lead electrosurgical instruments or 2-pin, 3-pin or 4-pin electrical instruments and able to selectively receive enhanced surgical devices with multiple electrical connections.

In one embodiment, the plug portion includes a plug housing having a
25 power pin extending therefrom. The power pin is advantageously positioned closer to a first side edge of the plug housing than a second side edge thereof, wherein the second side edge is opposite the first side edge.

Advantageously, the plug portion includes at least one position pin extending from the plug housing. Preferably, a first position pin extends from a
30 center of the plug housing in substantially the same direction as the power pin. A second position pin may be included which extends from the plug housing at a location off-set from the center thereof and in the same direction as the power pin.

The connector system may also advantageously include a prong extending from the plug housing and substantially in the same direction as the power pin. The prong is desirably positioned closer to a first side edge of the plug housing than a second side edge thereof, wherein the second side edge is
5 opposite the first side edge thereof.

The prong preferably includes a plurality of electrical contacts which provide electrical continuity to the electrosurgical generator. In one embodiment, the prong has a generally L-shaped cross-sectional profile for use with a six (6) contact electrosurgical system. In another embodiment, the
10 prong has a generally rectilinear cross section or profile for use with a four (4) contact system. Advantageously, the L-shaped cross-sectional profile blocks insertion of a plug portion into the plug receptacle portion which is upside down. Other shapes are also envisioned, e.g., generally rectangular, for lesser contact systems, e.g., a four (4) contact system.

15 Preferably, the plug receptacle portion is operatively retained in the electrosurgical generator and defines a recess for receipt of the plug portion therein. The plug receptacle portion advantageously includes a prong receptacle formed therein, the prong receptacle being shaped and dimensioned to receive the prong therein. It is envisioned that the plug receptacle portion
20 can include a plurality of apertures formed therein for receiving the power pin and the position pins. Preferably, each aperture includes a contact terminal operatively associated therewith. The plug receptacle portion advantageously includes at least one contact pin extending therethrough which is positioned to contact a respective one of the electrical contacts of the prong.

25 The prong desirably has an overall width which is less than about 0.43 inches and an overall height which is less than about 0.38 inches for the L-shaped six (6) contact prong. For prongs with less than six (6) contacts, e.g., four (4) contacts, the overall height may be less. The prong receptacle desirably has an overall width which is greater than about 0.39 inches and an
30 overall height which is greater than about 0.324 inches.

In one embodiment of the connector system, the connector system includes a tactile feedback mechanism which provides positive tactile feedback to the user that the plug portion has been properly inserted into the plug

receptacle portion. Advantageously, the tactile feedback mechanism includes a first post extending through and pivotally supported on the plug receptacle portion and a second post extending through and supported on the plug receptacle portion. Preferably, the first post is spring biased. The tactile
5 feedback mechanism also includes a linkage member which extends between the first post and the second post. The linkage member includes a first arm which extends radially from the first post and a second arm which is supported on and extends from the second post.

A camming pin extends through a distal end of the first arm. The
10 camming pin preferably includes a first portion slidably receivable in an elongate slot formed in the second arm. A second portion is slidably received in an arcuate slot formed in the prong receptacle. The second portion is extendable to engage a groove formed in a lower surface of the prong. A spring is positioned to bias the first portion to a distal-most position in the
15 elongate slot.

In one embodiment, the plug portion includes symbology provided on a surface thereof which includes information regarding the operative parameters of the electrosurgical instrument.

The present disclosure also relates to a connector system for connecting
20 an electrosurgical instrument to an electrosurgical generator which includes a plug portion and a plug receptacle portion disposed on the generator. The plug portion includes a plurality of mechanical interfaces which selectively mate with a corresponding plurality of mechanical interfaces in the plug receptacle portion. A tactile feedback mechanism is included for providing positive
25 feedback to the user that the mechanical interfaces of the plug portion have been properly mated with the corresponding mechanical interfaces of the plug receptacle portion.

The tactile feedback mechanism includes a pair of first and second posts extending through and pivotally supported on the plug receptacle portion and a
30 linkage member extending between the first post and the second post. The linkage member has a first arm extending radially from the first post and a second arm supported on and extending from the second post. A camming pin is included which extends through a distal end of the first arm. Upon insertion

of the plug portion into the receptacle portion, the camming pin rides along a slot disposed in the second arm to initially compress a spring. After a predetermined point of the camming pin riding along the slot, the spring subsequently expands to drive the camming pin through the slot thus towing
5 the prong portion into prong receptacle portion.

Other objects and features of the present disclosure will become apparent from consideration of the following description taken in conjunction with the accompanying drawings.

10 **BRIEF DESCRIPTION OF THE DRAWINGS**

Other objects and features of the present invention will become apparent from the following detailed description considered in connection with the accompanied drawings. It should be understood, however, that the drawings
15 are designed for the purpose of illustration only and not as a definition of the limits of the invention.

FIG. 1 is a schematic illustration of an electrosurgical instrument system in accordance with the present disclosure;

FIG. 2 is an enlarged perspective view of a connector system, in
20 accordance with an embodiment of the present disclosure, as seen from above;

FIG. 3 is an enlarged perspective view of the connector system of FIG. 2, as seen from below;

FIG. 4 is an enlarged exploded perspective view of the plug portion of the connector system of FIGS. 2-3;

25 FIG. 5 is a front elevational view of the receptacle portion of the connector system of FIGS. 2-3;

FIG. 6 is a front perspective view of the receptacle portion of the connector system of FIGS. 2-3;

FIG. 7 is an enlarged top perspective view of connector system of FIGS. 2-3, with portions of the receptacle portion cut away, illustrating the mating
30 and/or joining of the plug portion with the receptacle portion;

FIG. 8 is an enlarged top perspective view of the connector system of FIGS. 2-3, with portions of the receptacle portion cut away, illustrating the plug portion mated with the receptacle portion;

FIG. 9 is an enlarged bottom perspective view of the connector system of FIGS. 2-3, with portions of the receptacle portion broken away, illustrating the plug portion mated with the receptacle portion;

FIG. 10 is a perspective view of a plug portion in accordance with an alternate embodiment of the present disclosure, as seen from above;

FIG. 11 is a perspective view of the plug portion of FIG. 10 as seen from below;

FIG. 12 is a front elevational view of a receptacle portion according to an alternate embodiment of the present disclosure;

FIG. 13 is a rear perspective view of the receptacle portion of FIG. 12; and

FIG. 14 is a perspective view of a plug portion in accordance with yet another embodiment of the present disclosure.

DETAILED DESCRIPTION

Embodiments of the presently disclosed connector system for electrosurgical generators are described in detail herein with reference to the drawing figures wherein like reference numerals identify similar or identical elements. In the drawings and in the description which follows, the term "proximal", as is traditional, will refer to the end of the apparatus and/or device which is closest to the operator, while the term "distal" will refer to the end of the apparatus and/or device which is furthest from the operator.

Referring initially to FIG. 1, there is seen a perspective view of an electrosurgical instrument system in accordance with an exemplary embodiment of the present disclosure, generally indicated as reference numeral 10. Electrosurgical instrument system 10 includes an electrosurgical instrument 12 (e.g., an electrosurgical pencil) which is electrically connectable to a source of electrosurgical energy 14 (e.g., an electrosurgical generator).

Electrosurgical pencil 12 includes a housing 16 configured and adapted to support a blade receptacle 18 at a distal end thereof which, in turn, receives a replaceable electrocautery blade 20 therein. Electrosurgical pencil 12 further includes at least one activation button 22 supported on an outer surface of
5 housing 16. Activation button(s) 22 are operable to control the supply of RF electrical energy to blade 20 from electrosurgical generator 14.

By way of example only, electrosurgical generator 14 may be any one of the following, or equivalents thereof: the "FORCE FX", "FORCE 2" or "FORCE 4" generators manufactured by Valleylab, Inc. of Boulder, CO. It is
10 contemplated that electrosurgical generator 14 can be preset to selectively provide an appropriate first predetermined RF signal (e.g., about 1 to 300 watts) for tissue cutting and an appropriate second predetermined RF signal (e.g., about 1 to 120 watts) for tissue coagulation. However, as will be described in greater detail below, electrosurgical generator 14 preferably is
15 adapted to automatically configure itself to transmit particular RF signals depending on the particular electrosurgical instrument connected thereto.

As seen in FIGS. 1-9, electrosurgical instrument system 10 is provided with a connector system 100, as best seen in FIG. 2, which is configured and adapted to selectively connect particular electrosurgical instruments (e.g.,
20 electrosurgical pencils 12) to particular sources of electrosurgical energy (e.g., electrosurgical generators 14). Connector system 100 includes a plug or male portion 102 operatively associated with electrosurgical instrument 12 via a connecting wire 24 and a receptacle, socket or female portion 104 which is operatively associated with electrosurgical generator 14. Preferably, receptacle
25 portion 104 is "backward compatible", i.e., able to receive or connect to plug portions 102 of the various electrosurgical instruments disclosed herein as well as able to receive or connect other prior electrosurgical instruments which include less pins or prongs.

With reference to FIG. 4, plug portion 102 includes a housing portion
30 106 having a first-half section 106a and a second half-section 106b operatively engagable with one another, preferably, via a snap-fit engagement. Half-sections 106a, 106b are configured and adapted to retain a common power pin

108 and a plurality of electrical contacts 110 therebetween, as will be described in greater detail below.

Plug portion 102 includes a power pin 108 extending distally from housing 106 at a location preferably between first half-section 106a and second half-section 106b. Preferably, power pin 108 is positioned to be off center, i.e., closer to one side edge of housing 106 than the other. Plug portion 102 further includes at least one, preferably, a pair of position pins 112 also extending from housing 106. Position pins 112 are preferably positioned between half-sections 106a and 106b and are oriented in the same direction as power pin 108. Desirably, a first position pin 112a is positioned in close proximity to a center of housing 106 and a second position pin 112b is positioned to be off center and in close proximity to an opposite side edge of housing 106 as compared to power pin 108. Pins 112a, 112b and 108 are preferably located on plug portion 102 at positions which correspond to the pin positions of earlier connections which are compatible to earlier known generators.

Plug portion 102 further includes a prong 114 extending from housing 106. In particular, prong 114 includes a body portion 116 (see FIG. 4) extending from second half-section 106b of housing 106 and a cover portion 118 extending from first half-section 106a of housing 106. In this manner, when half-sections 106a, 106b are joined to one another, cover portion 118 of prong 114 encloses body portion 116. Preferably, prong 114 is positioned between power pin 108 and first position pin 112a. Prong 114 is configured and adapted to retain electrical contacts 110 therein such that a portion of each contact 110 is exposed along a front or distal edge thereof. While four contacts 110 are shown, it is envisioned that any number of contacts 110 can be provided, including and not limited to two, six and eight. Prong 114 is dimensioned to have an overall width which is less than about 0.43 inches and an overall height which is less than about 0.38 inches.

With continued reference to FIG. 4, connecting wire 24 includes a power supplying wire 120 electrically connected to power pin 108 and a plurality of control wires 122 electrically connected to contacts 110.

With reference to FIGS. 2 and 5-6, receptacle portion 104 of connector system 100 includes a housing 130 having a recess 132 formed therein.

Recess 132 is configured and dimensioned to receive plug portion 102 therein. Recess 132 includes a plurality of apertures 134 formed in a rear wall 136 thereof. Preferably, three apertures 134a-134c are provided. Apertures 134a-134c are preferably positioned and sized to respectively receive power pin 108 and position pins 112 therein when plug portion 102 is inserted into receptacle portion 104. As mentioned above, preferably, apertures 134a-134c are positioned to receive connector pins from prior known connectors to enable the connector system to be backward compatible.

As seen in FIG. 2, and in greater detail in FIGS. 7-9, receptacle portion 104 further includes contact terminals 138a-138c disposed behind rear wall 136 and in registration with a respective aperture 134a-134c. Contact terminals 138a-138c are configured and dimensioned to receive power pin 108 and position pins 112 therein. While only contact terminal 138a needs to be configured and adapted to create an electrical interface with power pin 108, it is within the scope of the present disclosure to have each contact terminal 138a-138c configured and adapted to provide electrical interfaces. For example, contact terminals 138a-138c can be fabricated from an electrically conductive material such that when plug portion 102 is inserted into receptacle portion 104 and power pin 108 is inserted into corresponding contact terminal 138a through aperture 134a, contact terminal 138a electrically engages power pin 108 and, in turn, enables transmission of RF energy from electrosurgical generator 14 to electrosurgical instrument 12. One practicable example would be to utilize the positive engagement of pins 112a, 112b within the contact terminals 138a, 138b as a safety mechanism, i.e., pins 112a, 112b must be properly and fully seated within terminals 138a, 138b to allow the generator to supply energy to the instrument.

With continued reference to FIGS. 5 and 6, receptacle portion 104 further includes a prong receptacle 140 formed in rear wall 136. Prong receptacle 140 is preferably formed between apertures 134a and 134b. Prong receptacle 140 is sized and shaped to receive prong 114 therein when plug portion 102 is inserted into receptacle portion 104.

Since prong 114 extends from second half-section 106b of housing 106 of plug portion 102, plug portion 102 will not enter receptacle portion 104

unless plug portion 102 is in the proper orientation. In this manner, it is ensured that power pin 108 is in electrical contact with corresponding contact terminal 138a. As can be appreciated, connectors which do not include prongs 114 are still connectable to receptacle portion 104 (i.e., backward compatible).

5 However, electrical contacts 110 associated with prong 114 are designed to further enhance the electrical connection between the instrument and the generator and give the surgeon more feedback at the operative site. For example, commonly-owned and concurrently-filed U.S. Patent Application No. [11697(203-3624)] entitled "ELECTROSURGICAL PENCIL WITH IMPROVED

10 CONTROLS" and PCT Application Serial No. PCT/US03/22900 entitled "ELECTROSURGICAL PENCIL WITH DRAG SENSING CAPABILITY" describe several features which would typically utilize the additional electrical contacts 110 in prong 114 to enhance feedback to the surgeon at the operative site, e.g., mode or power settings or sensors for movement, position, drag or

15 temperature.

Preferably, as seen in FIGS. 5 and 6, prong receptacle 140 includes a lower portion 140a configured and dimensioned to receive prong 114, as described above. Prong receptacle 140 is dimensioned to have an overall width which is greater than about 0.39 inches and an overall height which is

20 greater than about 0.324 inches. It is envisioned that, prong receptacle 140 can further include an upper portion 140b which is integral with lower portion 140a and defines a prong receptacle 140 having an "L-shaped" cross-sectional profile. In this manner, prong receptacle 140 can receive prongs having any number of cross-sectional profiles, including and not limited to, rectangular (e.g.

25 prong 114), square and "L-shaped" (see FIGS. 10 and 11). Moreover, "L-shaped" prong receptacle 140 defines a corner 140c which is shaped and sized to block the insertion of a traditional three pin plug when the traditional plug is being inserted upside down.

With continued reference to FIGS. 5 and 6, prong receptacle 140

30 includes a plurality of openings 142 formed in a rear wall 144 thereof for permitting passage of contact pins 146, preferably spring-type contact pins, therethrough. In this manner, when plug portion 102 is inserted into receptacle

portion 104, electrical contacts 110 of prong 114 will electrically engage pins 146.

As best seen in FIG. 5, prong receptacle 140 can include four openings 142 formed in lower portion 140a and two openings 142 formed in upper portion 140b. While such an arrangement is shown and described, it is within the scope of the present disclosure to include various other arrangements including various numbers of pins 146.

With reference to FIGS. 2-9, connector system 100 further includes a tactile feedback mechanism 150 (see FIG. 9) for securing plug portion 102 into receptacle portion 104, for providing positive feedback to the user that plug portion 102 has been fully inserted into receptacle portion 104, and for compensating for increasing resistance that exists as prong 114 enters into prong receptacle 140 and engages pins 146.

Tactile feedback mechanism 150 includes a first post 152 extending through and pivotally supported on receptacle portion 104. Preferably, first post 152 is spring biased by a spring member 154. Tactile feedback mechanism 150 further includes a second post 156 extending through and supported on receptacle portion 104. A linkage member 158 extends between first post 152 and second post 156. Linkage member 158 includes a first arm 158a extending radially from first post 152 and a second arm 158b supported on and extending from second post 156.

A camming pin 160 extends through a distal end of first arm 158a and includes a first portion 160a which is slidably receivable in an elongate slot 162 (see FIG. 2) formed in second arm 158b and a second portion 160b, extending in an opposite direction to first portion 160a, which is slidably receivable in an arcuate slot 164 formed in prong receptacle 140 (see FIGS. 3, 6 and 7). First portion 160a is biased to the distal-most position of elongate slot 162 by a spring 166 disposed within second arm 158b. Second portion 160b extends through arcuate slot 164 an amount sufficient to be engagable with an "L-shaped" groove and/or recess 148 formed in a lower surface of prong 114 (see FIGS. 3, 4 and 9) in order to define a bayonet-type engagement. Alternatively, second arm 158b may extend "opposite" first post 152 and be joined by a tension spring (not shown) to first post 152.

In use, with camming pin 160 initially positioned near the entrance of prong receptacle 140, as prong 114 enters prong receptacle 140, second portion 160b of camming pin 160 enters into and engages groove 148 of prong 114. As prong 114 is further advanced, camming pin 160 rides along arcuate slot 164 and elongate slot 162, thereby compressing spring 166. Once prong 114 is advanced beyond a point of criticality, spring 166 expands and thus drives camming pin 160 through the remainder of arcuate slot 164 thereby drawing prong 114 into prong receptacle 140.

It is envisioned that spring 154 may provide an additional safety feature as well. For example, spring 154 is provided in pin 152 to allow a mating chamfer 153 on pin 152 (Fig. 12) to ride up and over the chamfer 151 (Fig. 3) on plug 102. This is necessitated to allow plug 102 to be inserted in the event that the cam is disengaged prior to being pulled back to the proximal position upon removal of the last plug 102 to have been inserted.

As seen in FIGS. 1, 2, 4 and 7-8, connector system 100 further includes symbology 170 provided on a surface of plug portion 102, preferably on an outer surface of first half-section 106a of housing 106. Symbology 170 can include and is not limited to at least one of the following: bar codes, UPC codes, Postnet, Data Matrix, Maxi Code, Aztec Code and the like. Preferably, symbology 170 includes at least one Aztec code, preferably, a pair of Aztec codes positioned side-by-side.

Aztec Code is a high density two dimensional matrix style bar code symbology that can encode up to 3750 characters from the entire 256 byte ASCII character set. The Aztec code symbol is built on a square grid with a bulls-eye pattern at its center. Data is encoded in a series of "layers" that circle around the bulls-eye pattern. Each additional layer completely surrounds the previous layer thus causing the symbol to grow in size as more data is encoded yet the symbol remains square.

In this manner, each electrosurgical instrument 12 is provided with a characteristic symbology 170 containing information regarding the operative parameters for that particular electrosurgical instrument, such as, for example, the operative RF energy setting, the operative waveform setting, and the algorithm for interpreting signals on contact(s) 110 and pin(s) 146.

Connector system 100 can further include a symbology reader and/or scanner (not shown) operatively supported in receptacle portion 104. Accordingly, when plug portion 102 is mated with receptacle portion 104, the reader scans and reads the operative parameters contained in the characteristic symbology 170 and transmits the operative parameters to electro-surgical generator 14 which in turn automatically configures and/or sets itself to supply operative parameters (e.g., preset ranges, preferred settings and the like) to electro-surgical instrument 12. Alternatively, electro-surgical generator 14 can be engaged with a data table which, once the instrument is identified, will transmit the appropriate RF parameter to the identified instrument. In addition, as described above, symbology 170 can also be used as a positive engagement mechanism. For example, the symbology must be aligned or in a position to allow the instrument to operate or to allow the instrument to operate in an enhanced mode.

For example and with respect to Fig. 6, receptacle 140 may contain additional symbology 170' on the interior surface opposite the scanner window similar to that on plug 12. The symbology 170' is positioned between the power pin and the next adjacent pin. The scanner will then read the symbology 170' whenever a plug is not inserted. When a plug is inserted, the symbology 170' will be blocked and the scanner will then read the symbology 170 on the plug 102 to determine pencil type and the appropriate electro-surgical settings associated with that particular pencil. If the symbology 170' is blocked but no new symbology 170 is identified, then the generator will determine that the plug 102 is of an old style pencil without enhanced capabilities (e.g., an E2525 or E2516 Electro-surgical Pencil sold by Valleylab - a division of Tyco Healthcare LP in Colorado). Old style pencils will respond to switch signals on pins 138b and 138c outputting RF on a pin 138 as called for by the surgeon. The symbology 170' in the receptacle is preferably positioned such that flying leads from existing devices will not obscure the symbology 170' and therefore will not enable the electro-surgical generator to output RF through pin 108.

It is envisioned that connector system 100 can include a positive engagement mechanism configured and adapted to ensure proper engagement of prong portion 102 in receptacle portion 104 prior to allowing activation of

electrosurgical instrument 12. For example, the positive engagement mechanism may include an optical coupler pair (e.g., an optical coupler member operatively associated with prong portion 102 and a cooperating coupler member operatively associated with receptacle portion 104, for example, reflective diodes), mechanical coupler pairs, electro-mechanical coupler pairs, and/or bar code readers. In addition, the positive engagement mechanism can be configured and adapted to not be activated and/or triggered by insertion of "flying leads", from prior art instruments, into receptacle portion 104 thereby preventing activation of such instruments.

Turning now to FIGS. 10 and 11, a plug portion, in accordance with an alternate embodiment of the present disclosure, is designated generally as 202. Plug portion 202 is similar to plug portion 102 and will only be described in detail to the extent necessary to identify differences in construction and/or operation.

Plug portion 202 includes a prong 214 extending from housing 206. In particular, prong 214 includes a first portion 216 extending from first half-section 206a of housing 206 and a second portion 218 extending from second half-section 206b of housing 206. Preferably, second portion 218 of prong 214 has a width which is greater than a width of first portion 216. In this manner, when first and second half-sections 206a, 206b of housing 206 are joined to one another, prong 214 has an L-shaped transverse cross-sectional profile. In particular, prong 214 is configured and dimensioned to be received in complementary shaped prong receptacle 140 of receptacle portion 104 (see FIGS. 4 and 5).

Prong 214 includes a plurality of contacts 210 exposed along a front surface thereof. In particular, prong 214 includes a first set of contacts 210a, preferably two, exposed along a front surface of first portion 216 of prong 214 and a second set of contacts 210b, preferably, four, exposed along a front surface of second portion 218 of prong 214.

Accordingly, the first set of contacts 210a electrically engage pins 146 extending from openings 142 formed in upper portion 140b of prong receptacle 140. In addition, the second set of contacts 210b electrically engage pins 146

extending from opening 142 formed in lower portion 140a of prong receptacle 140.

Turning now to FIGS. 12 and 13, a receptacle portion, in accordance with an alternate embodiment of the present disclosure, is designated generally as 204. Receptacle portion 204 is similar to receptacle portion 104 and will only be described in detail to the extent necessary to identify differences in construction and/or operation.

Receptacle portion 204 includes a prong receptacle 240 having a substantially rectilinear cross-sectional profile. Prong receptacle 240 is configured and dimensioned to receive prong 114 and/or prong 214 therein. Prong receptacle 240 includes a plurality of openings 242 formed in a rear wall 244 thereof. Preferably, two rows of openings 242 are formed, a first row including three openings and a second row including four openings. A pin 146 (not shown) can extend from each opening 242 for electrical engagement with contacts 210.

Turning now to FIG. 14, a plug portion, in accordance with yet another alternate embodiment of the present disclosure, is designated generally as 302. Plug portion 302 includes a housing 306 including a first half-section 306a and a second half-section 306b defining a plane therebetween. Housing 306 further includes a first side portion 308a and a second side portion 308b. Preferably, second side portion 308b has a length which is greater than a length of first side portion 308a.

As seen in FIG. 14, power pin 108 extends distally from first side portion 308a. Preferably, power pin 108 extends from first side portion 308a an amount sufficient such that a distal-most end of power pin 108 is substantially even with a distal-most surface of second side portion 308b.

Second side portion 308b includes a plurality of contacts 310 exposed along the distal-most surface thereof. In particular, second side portion 308b includes eight contacts 310 exposed along a distal-most surface thereof. Preferably, contacts 310 are in the same plane as power pin 108.

It is envisioned that electrosurgical generator 14 includes a receptacle portion (not shown) configured and dimensioned to receive and mate with plug portion 302.

While several embodiments of the disclosure have been shown in the drawings, it is not intended that the disclosure be limited thereto, as it is intended that the disclosure be as broad in scope as the art will allow and that the specification be read likewise. Therefore, the above description should not
5 be construed as limiting, but merely as exemplifications of preferred embodiments.

Those skilled in the art will envision other modifications within the scope and spirit of the claims appended hereto.

IN THE CLAIMS

1. A connector system for connecting an electrosurgical instrument to an electrosurgical generator, the connector system comprising:
- 5 a plug portion connectable to the electrosurgical instrument, said plug portion including a plurality of pins which extend outwardly therefrom and an electrical prong which extends outwardly therefrom; and
- a plug receptacle portion disposed within the generator, said plug receptacle portion defining a recess for receiving said plug portion therein, said
- 10 plug receptacle portion including a corresponding plurality of pin receptacles for receiving said pins from said plug portion and said plug receptacle also including a prong receptacle for receiving said prong, said prong receptacle including a smart connection which is backward compatible.
- 15 2. The connector system according to claim 1, wherein the plug portion includes a plug housing having a power pin extending therefrom.
3. The connector system according to any preceding claim, wherein the power pin is positioned closer to a first side edge of the plug housing than a
- 20 second side edge thereof, wherein the second side edge is opposite the first side edge thereof.
4. The connector system according to any preceding claim, wherein the plug portion further includes at least one position pin extending from the
- 25 plug housing.
5. The connector system according to any preceding claim, wherein a first position pin extends from a center of the plug housing and in substantially the same direction as the power pin.
- 30 6. The connector system according to any preceding claim, wherein a second position pin extends from the plug housing at a location off-set from the center thereof and in the same direction as the power pin.

7. The connector system according to any preceding claim, further comprising a prong extending from the plug housing and substantially in the same direction as the power pin.

5 8. The connector system according to any preceding claim, wherein the prong is positioned closer to a first side edge of the plug housing than a second side edge thereof, wherein the second side edge is opposite the first side edge thereof.

10 9. The connector system according to any preceding claim, wherein the plug portion includes a first position pin extending from a center of the plug housing and in substantially the same direction as the power pin, wherein the prong is positioned between the power pin and the first position pin.

15 10. The connector system according to any preceding claim, wherein the prong includes a plurality of electrical contacts.

20 11. The connector system according to any preceding claim, wherein the prong has a first geometry and said receptacle has a second geometry which is matingly compatible with said first geometry of said prong.

25 12. The connector system according to any preceding claim, wherein the prong has at least one of a generally L-shaped cross-sectional profile and a rectilinear-shaped profile.

 13. The connector system according to any preceding claim, wherein the plug receptacle portion includes a housing operatively retained in the electrosurgical generator and defining a recess for receipt of the plug portion therein.

30 14. The connector system according to any preceding claim, wherein the plug receptacle portion includes a prong receptacle formed therein, the prong receptacle being shaped and dimensioned to receive the prong therein.

15. The connector system according to any preceding claim, wherein the plug receptacle portion includes a plurality of apertures formed therein for receiving the power pin and the position pins therein.

5 16. The connector system according to any preceding claim, wherein each aperture includes a contact terminal operatively associated therewith.

17. The connector system according to any preceding claim, wherein the plug receptacle portion includes at least one contact pin extending
10 therethrough.

18. The connector system according to any preceding claim, wherein the contact pins are positioned to contact a respective one of the electrical contacts of the prong.

15 19. The connector system according to any preceding claim, wherein the prong has an overall width which is less than about 0.43 inches and an overall height which is less than about 0.38 inches.

20 20. The connector system according any preceding claim, wherein the prong receptacle has an overall width which is greater than about 0.39 inches and an overall height which is greater than about 0.324 inches.

21. The connector system according any preceding claim, further
25 comprising a tactile feedback mechanism for providing positive feedback to the user that the plug portion has been properly inserted into the plug receptacle portion.

22. The connector system according to any preceding claim, wherein
30 the tactile feedback mechanism includes:

a first post extending through and pivotally supported on the plug receptacle portion, wherein the first post is spring biased;

a second post extending through and supported on the plug receptacle portion;

a linkage member extending between the first post and the second post, the linkage member including a first arm extending radially from the first post
5 and a second arm supported on and extending from the second post; and

a camming pin extending through a distal end of the first arm, the camming pin including:

a first portion slidably receivable in an elongate slot formed in the second arm;

10 a second portion slidably receivable in an arcuate slot formed in the prong receptacle, the second portion extending an amount sufficient to engage a groove formed in a lower surface of the prong; and

a spring positioned to bias the first portion to a distal-most position of the elongate slot.

15

23. The connector system according to any preceding claim, wherein the plug portion includes symbology provided on a surface thereof.

24. The connector system according to any preceding claim, wherein
20 the symbology includes information regarding the operative parameters of the electrosurgical instrument.

25. A connector system for coupling electrosurgical instruments to electrosurgical generators, the connector system comprising:

25 a plug portion connectable to an electrosurgical instrument, the plug portion of the electrosurgical instrument having a shape specific to a particular manufacturer; and

a plug receptacle portion supported on the electrosurgical generator; the plug receptacle portion being shaped to receive the plug portion of the
30 electrosurgical instrument of the particular manufacturer and the plug portion of the electrosurgical instrument of any other manufacturer.

26. The connector system according to claim 26, wherein the plug receptacle portion includes a prong receptacle formed therein configured and dimensioned to receive the prong therein.

5 27. The connector system according to claim 26 or 27, further comprising a tactile feedback mechanism for providing positive feedback to the user that the plug portion has been properly inserted into the plug receptacle portion.

10 28. The connector system according to claim 26, 27 or 28, wherein the prong receptacle is configured and dimensioned to block insertion of a plug portion therein which is in an incorrect orientation.

29. A connector system for connecting an electrosurgical instrument
15 to an electrosurgical generator, the connector system comprising:

a plug portion and a plug receptacle portion disposed on said generator, said plug portion including a plurality of mechanical interfaces which selectively mate with a corresponding plurality of mechanical interfaces in said plug receptacle portion;

20 a tactile feedback mechanism for providing positive feedback to the user that the mechanical interfaces of said plug portion have been properly mated with said corresponding mechanical interfaces of said plug receptacle portion, said tactile feedback mechanism including:

a pair of first and second posts extending through and pivotally
25 supported on the plug receptacle portion;


a linkage member extending between the first post and the second post, the linkage member including a first arm extending radially from the first post and a second arm supported on and extending from the second post; and


30 a camming pin extending through a distal end of the first arm wherein upon insertion of the plug portion into the receptacle portion said camming pin rides along a slot disposed in said second arm to initially

compress a spring which subsequently expands to drive the camming pin through the slot thus towing said prong portion into prong receptacle portion.

5

1/10

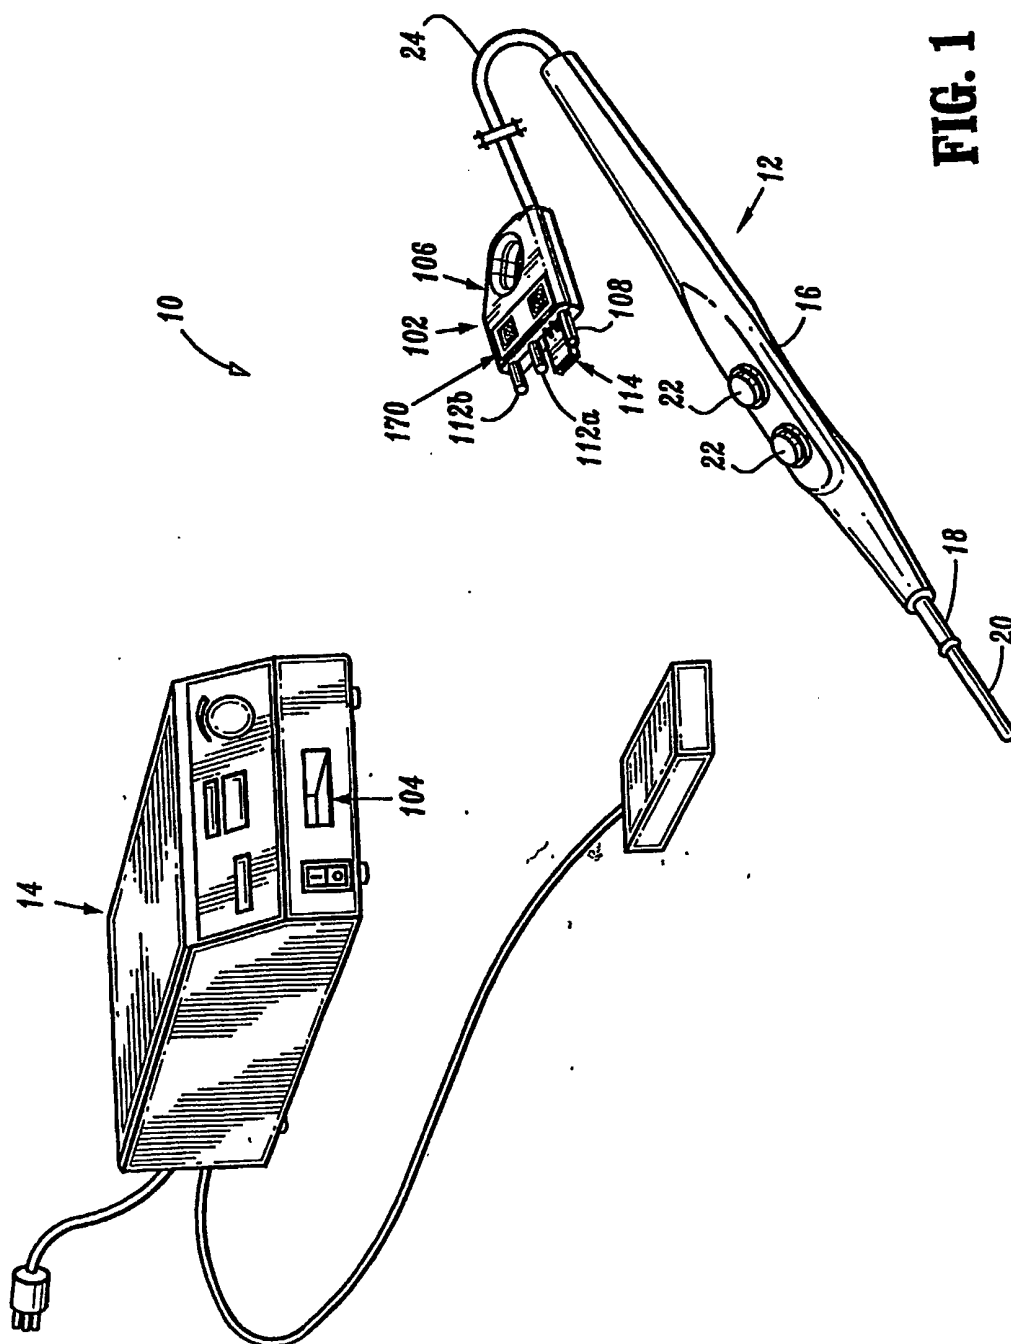

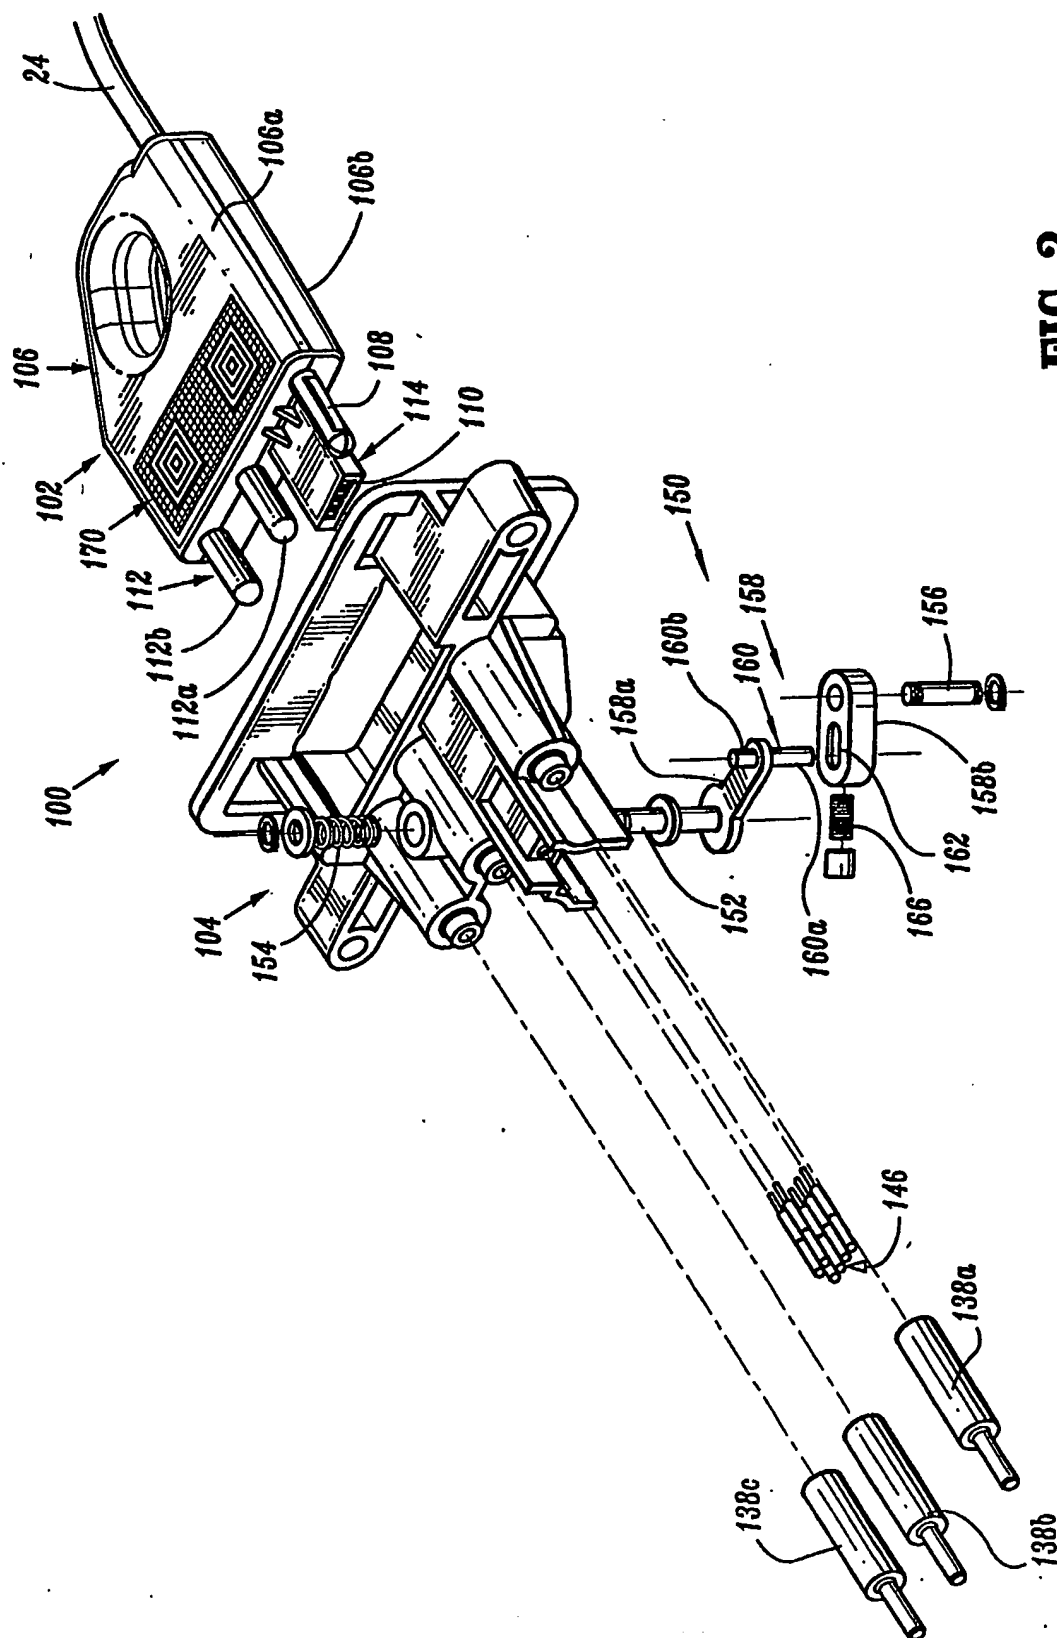

3/10

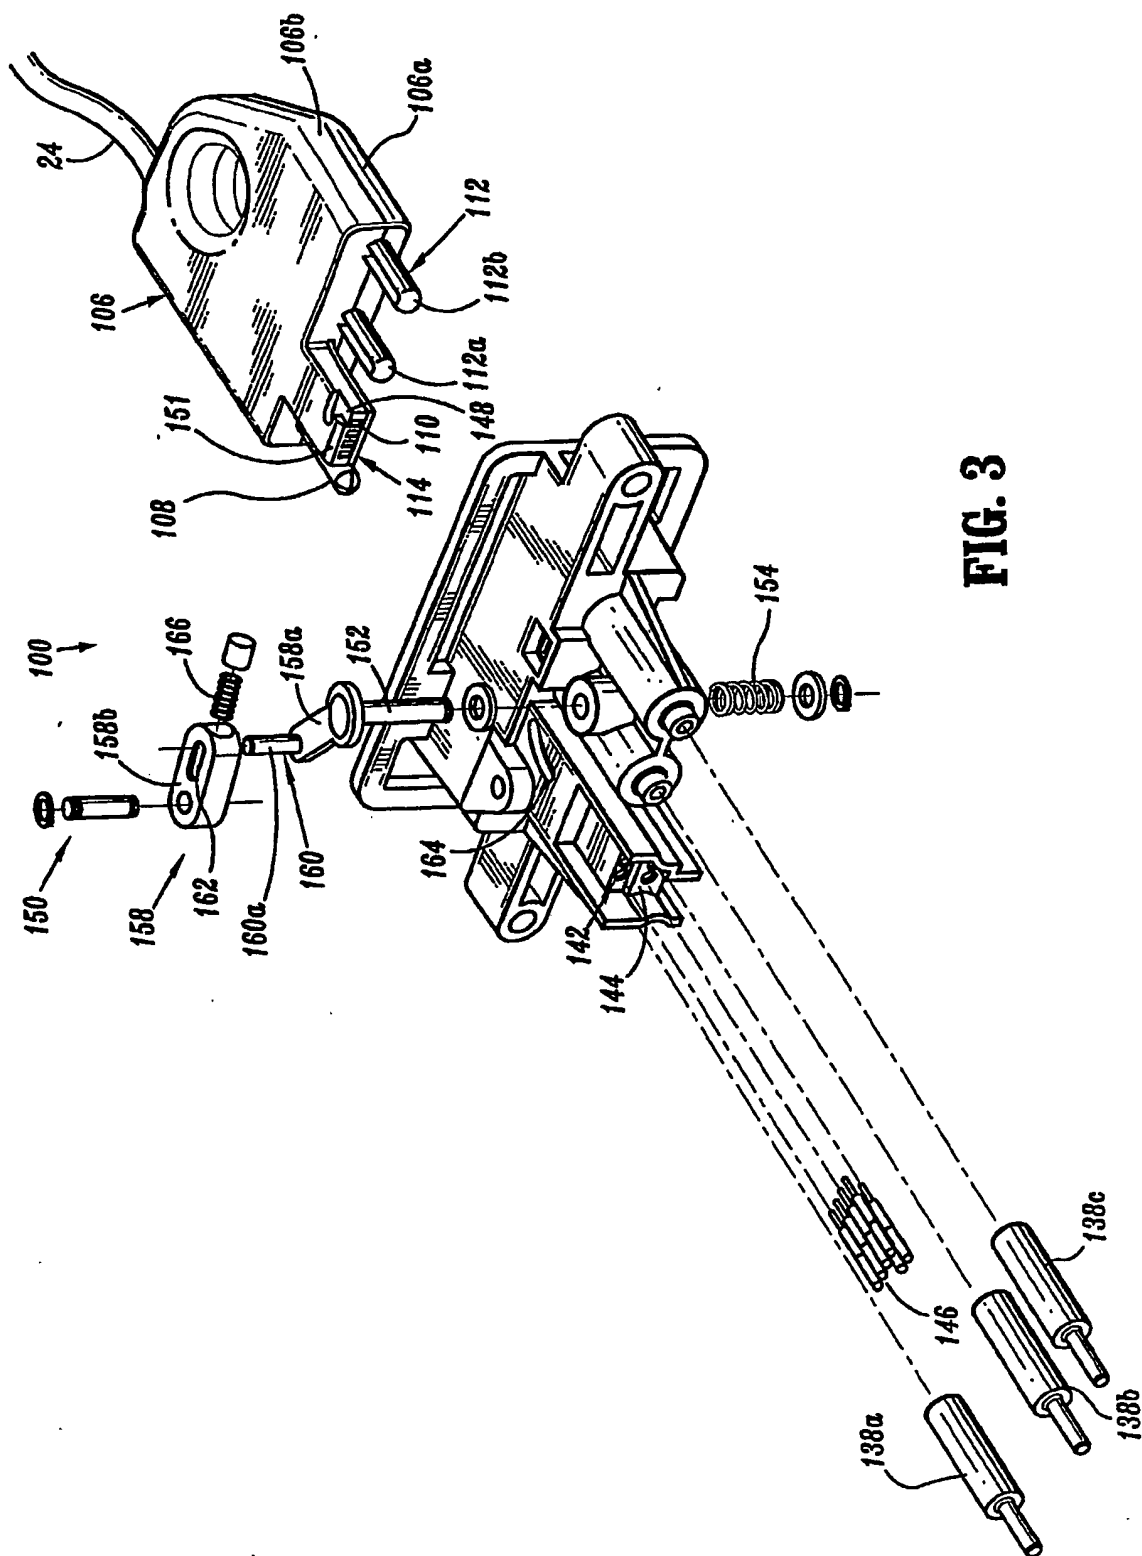


FIG. 3

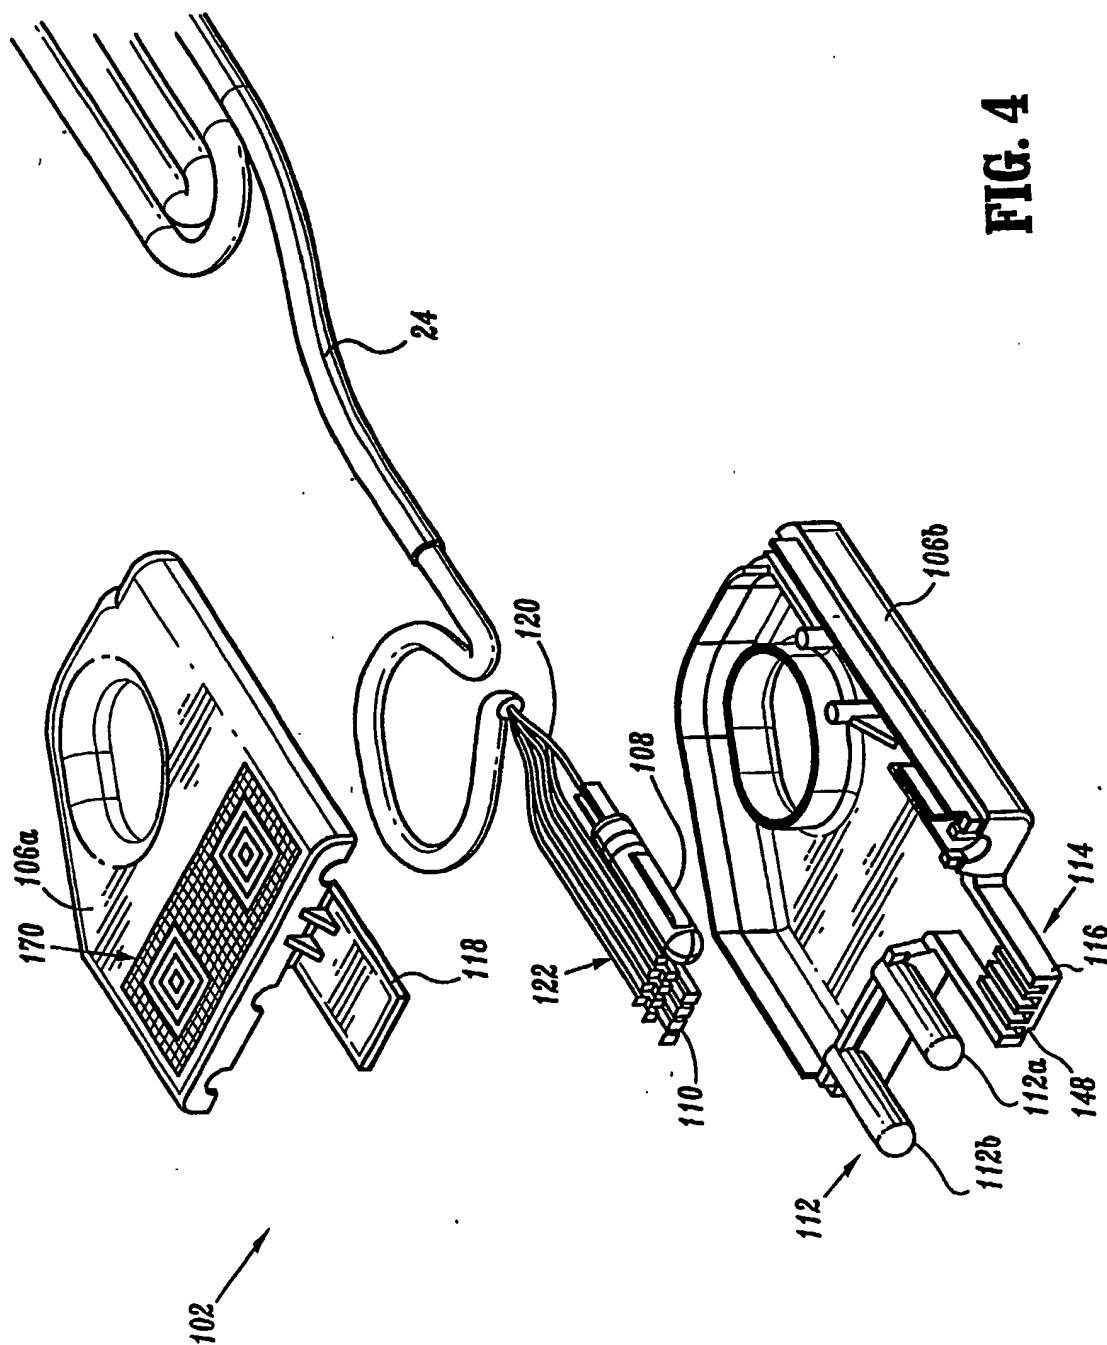


FIG. 4

5/10

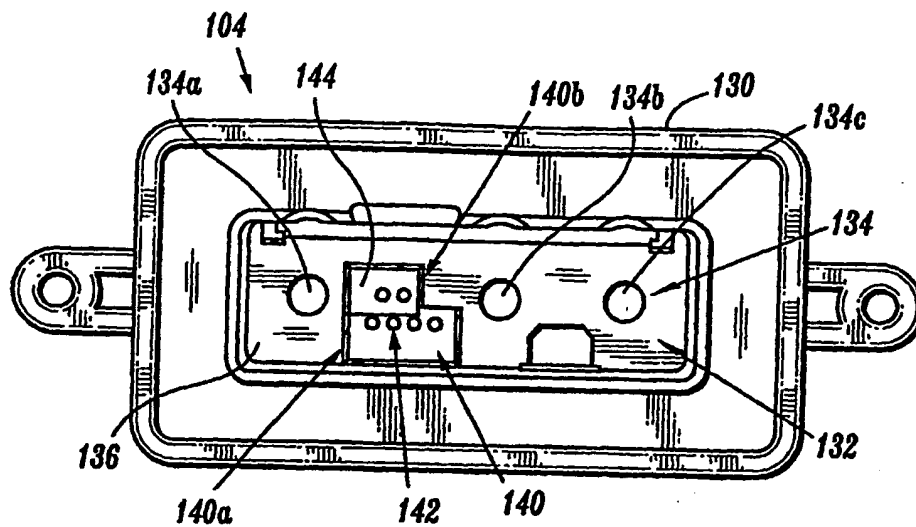


FIG. 5

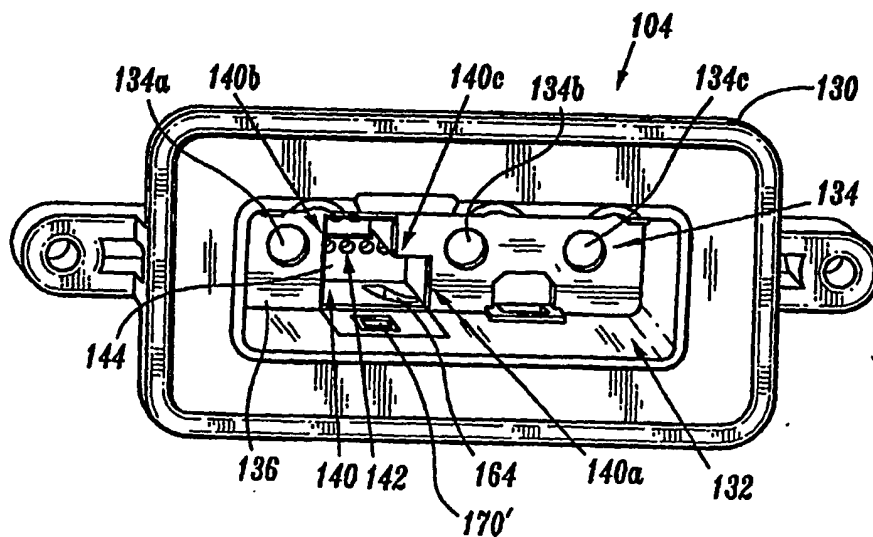


FIG. 6

6/10

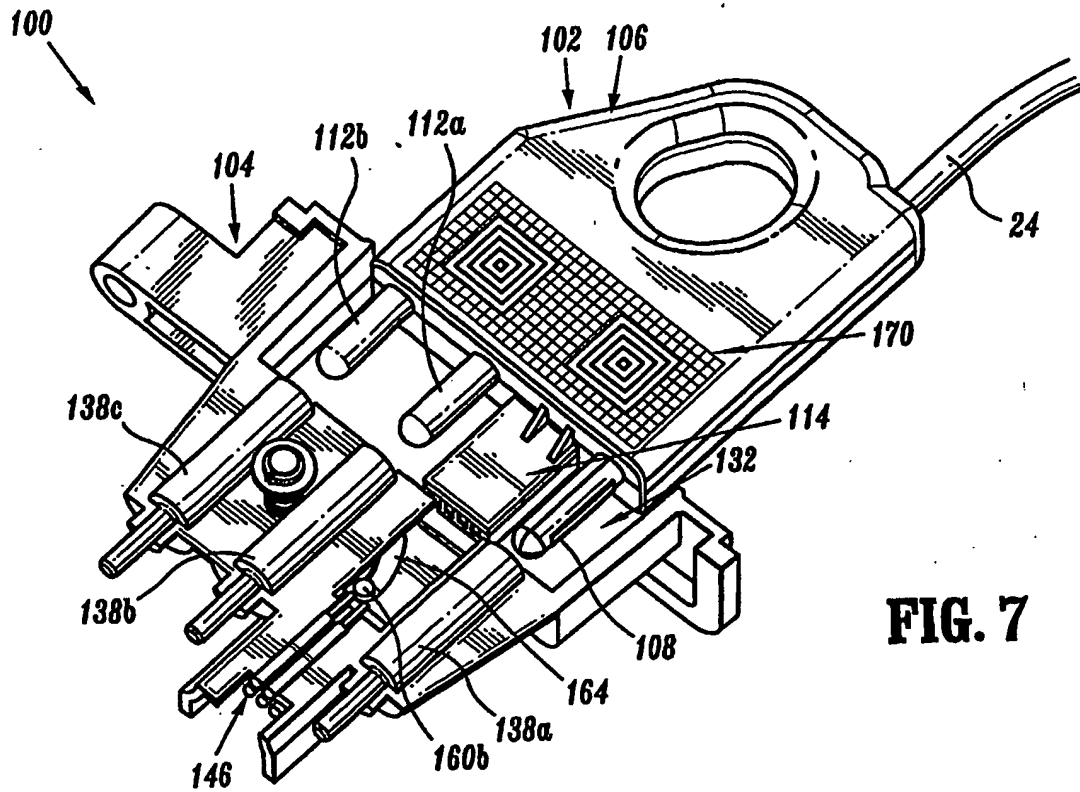


FIG. 7

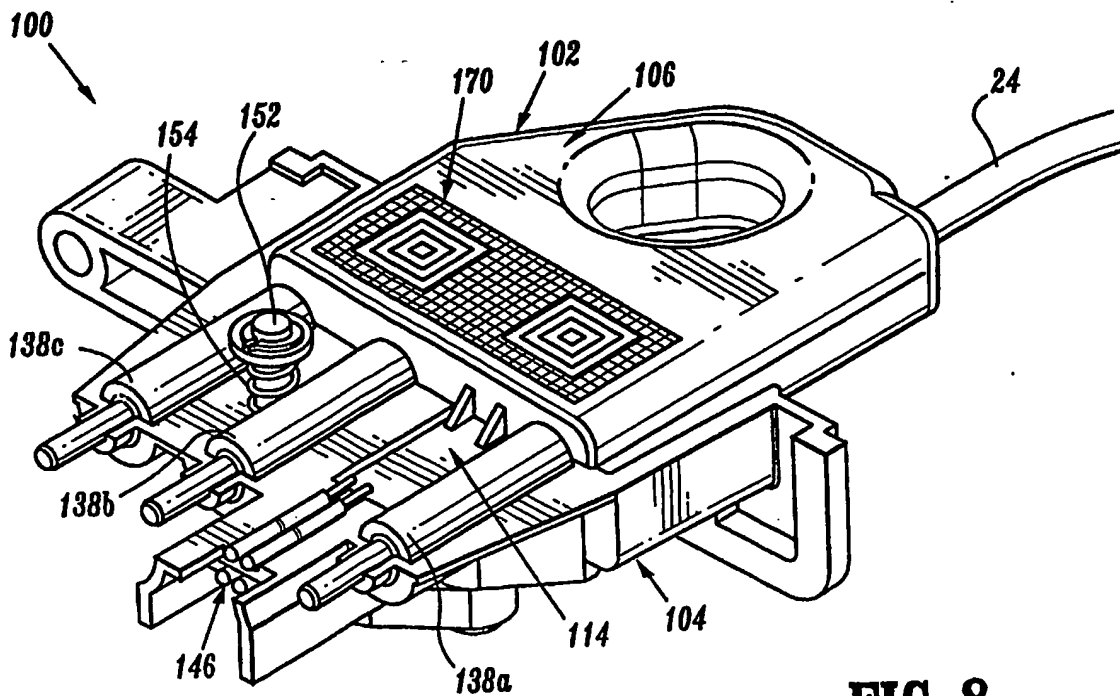


FIG. 8

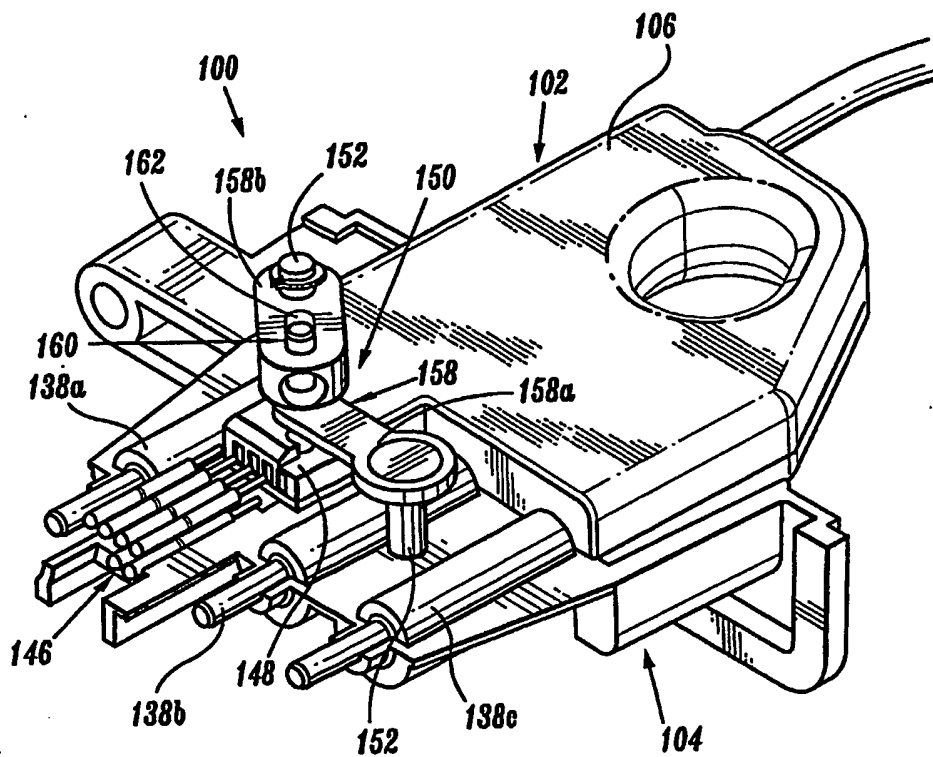


FIG. 9

8/10

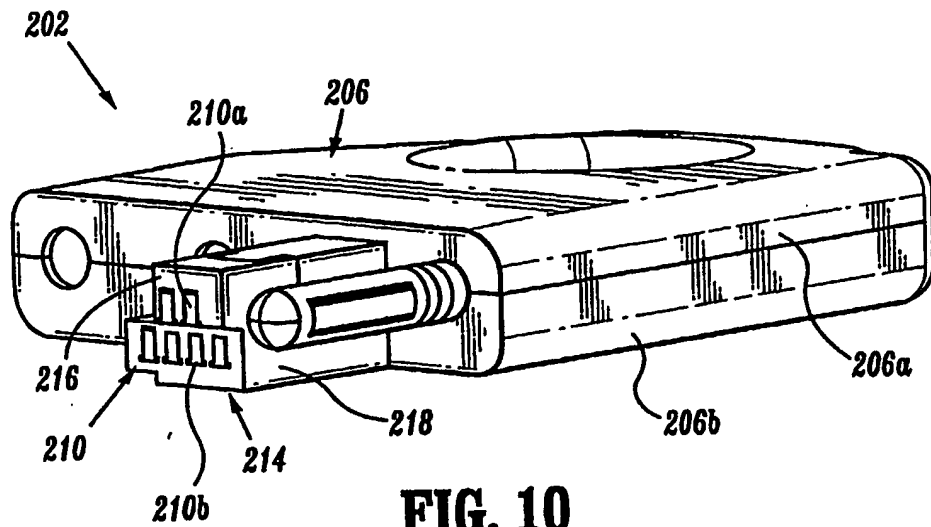


FIG. 10

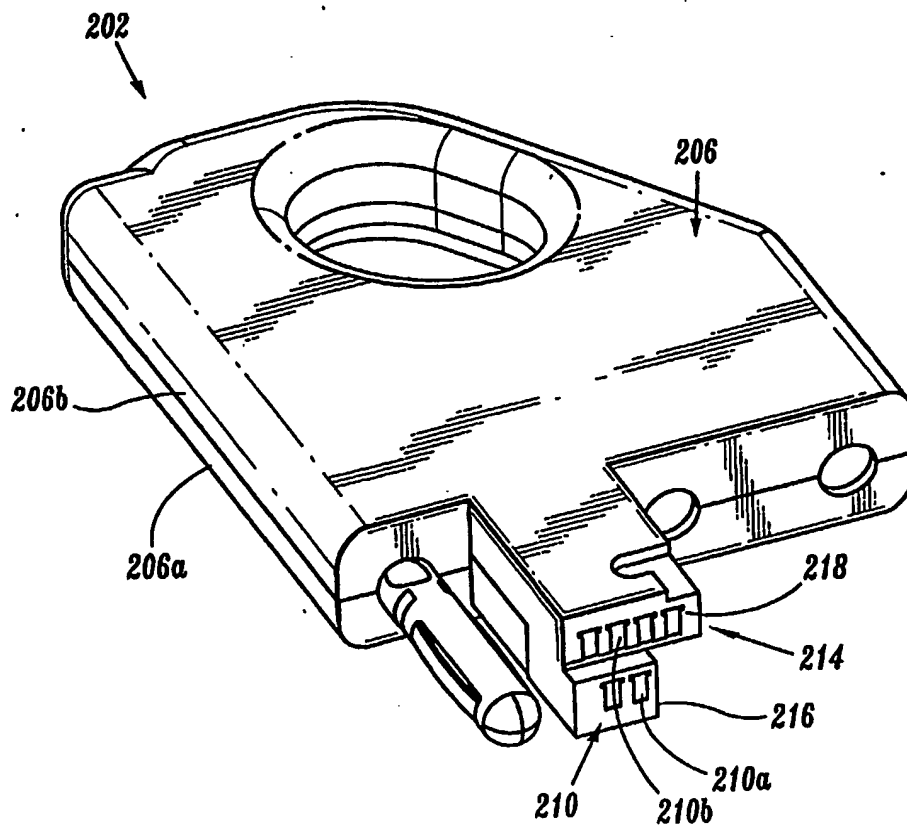
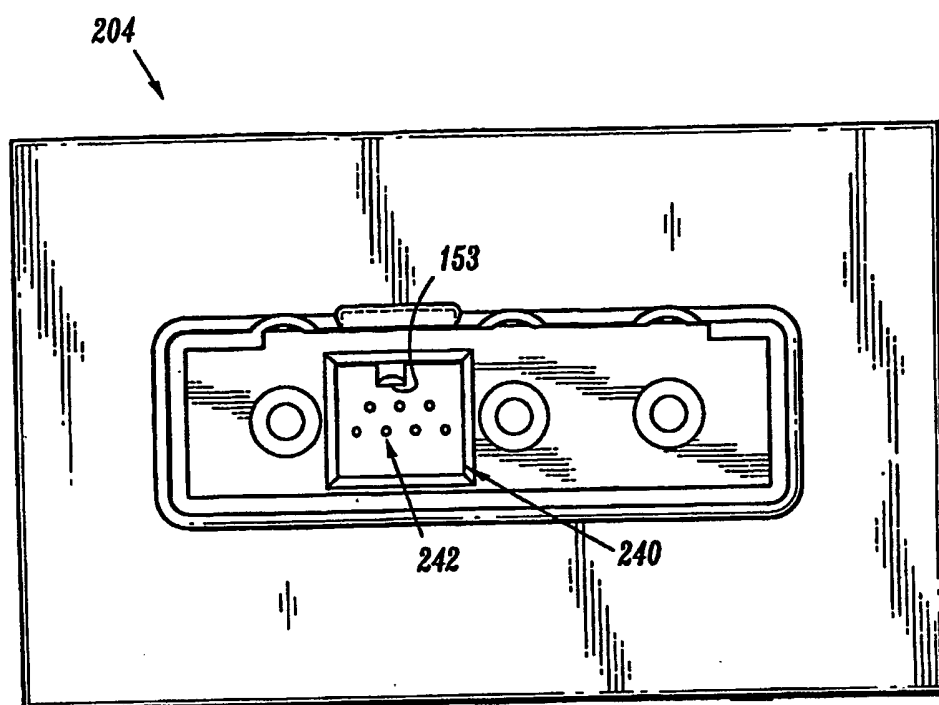
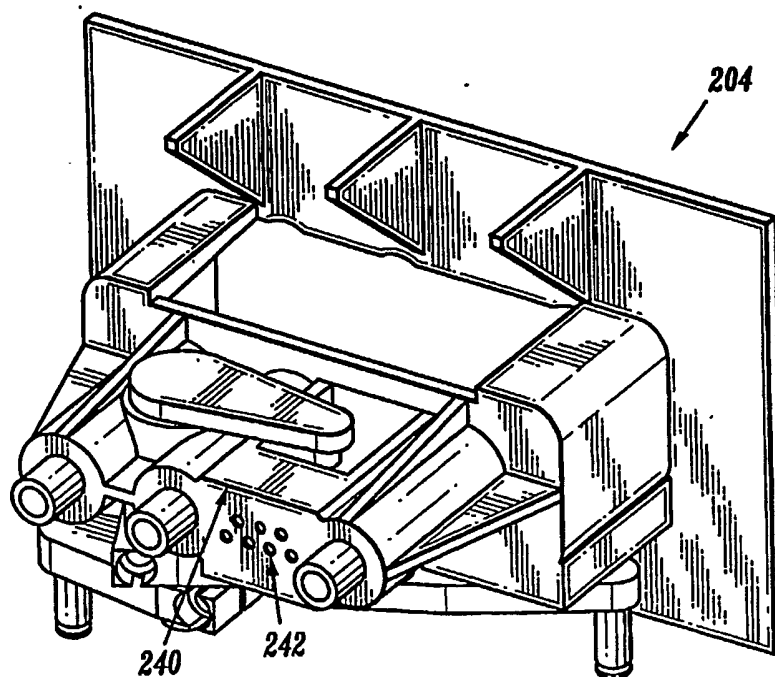


FIG. 11

9/10

**FIG. 12****FIG. 13**

SUBSTITUTE SHEET (RULE 26)

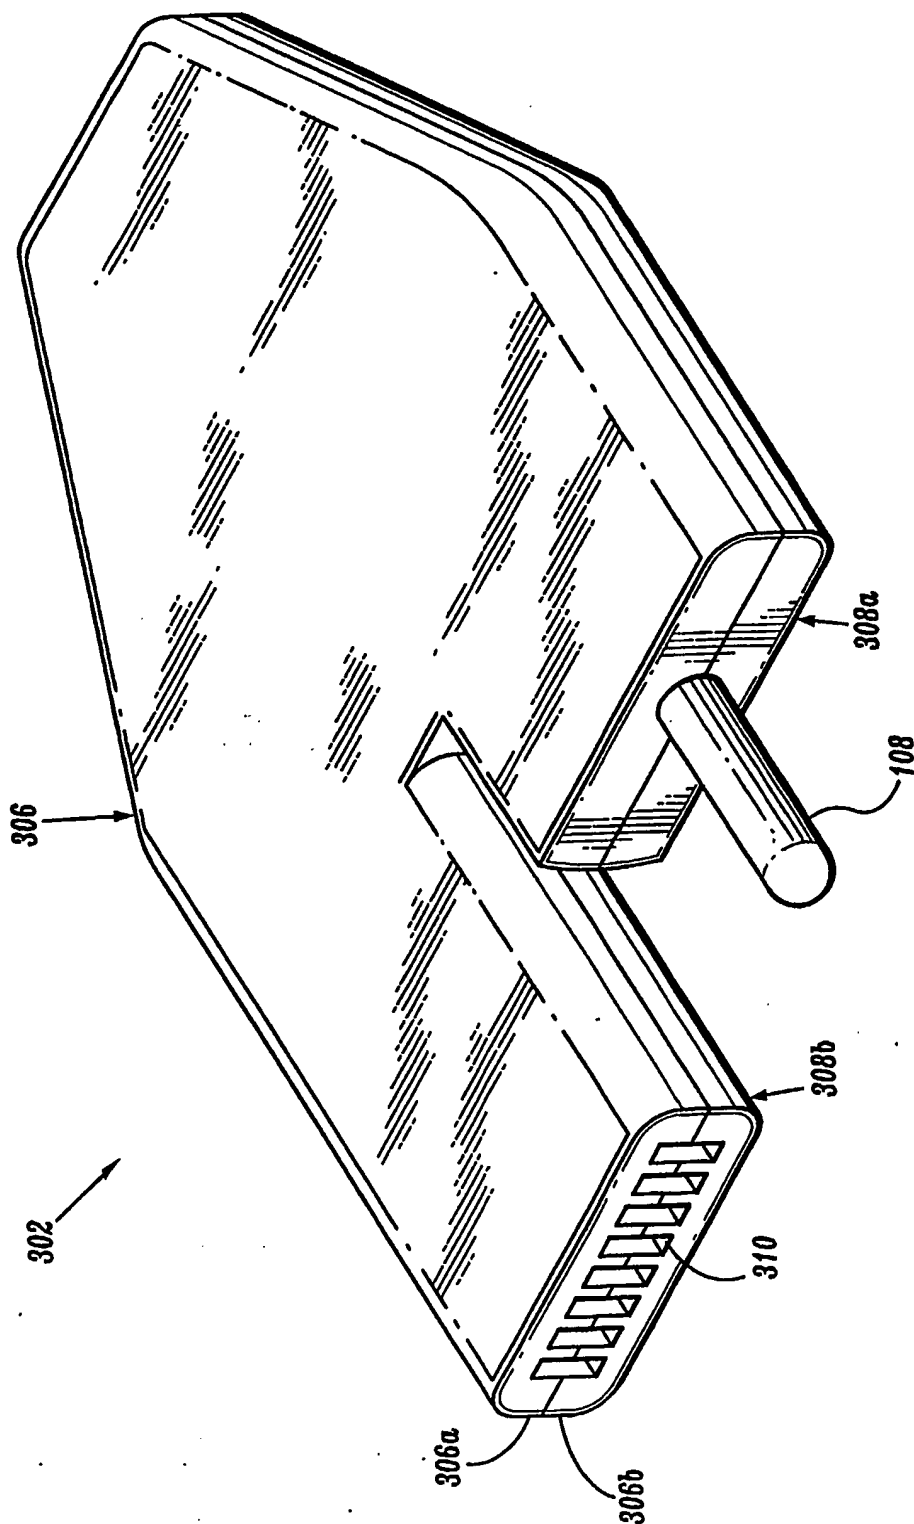


FIG. 14

SUBSTITUTE SHEET (RULE 26)

THIS PAGE BLANK (USPTO)

INTERNATIONAL SEARCH REPORT

International Application No
PCT/US 03/37110

A. CLASSIFICATION OF SUBJECT MATTER

IPC 7 H01R13/642 A61B18/12

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

IPC 7 A61B H01R

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practical, search terms used)

EPO-Internal, WPI Data

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	US 2002/035364 A1 (SCHOENMAN ARTHUR ET AL) 21 March 2002 (2002-03-21) page 2 - page 4; figures 7-12	1-21, 23-28
A	US 6 338 657 B1 (HARPER RICHARD M ET AL) 15 January 2002 (2002-01-15) the whole document	1-29
A	EP 1 293 171 A (ELLMAN, ALAN G; GARITO, JON C) 19 March 2003 (2003-03-19) the whole document	1-29
A	US 2003/078572 A1 (PEARSON CHRISTOPHER ET AL) 24 April 2003 (2003-04-24) the whole document	1-29



Further documents are listed in the continuation of box C.



Patent family members are listed in annex.

* Special categories of cited documents :

- *A* document defining the general state of the art which is not considered to be of particular relevance
- *E* earlier document but published on or after the international filing date
- *L* document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)
- *O* document referring to an oral disclosure, use, exhibition or other means
- *P* document published prior to the international filing date but later than the priority date claimed

- *T* later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention
- *X* document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone
- *Y* document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art.
- *G* document member of the same patent family

Date of the actual completion of the international search

7 July 2005

Date of mailing of the international search report

25/07/2005

Name and mailing address of the ISA

European Patent Office, P.B. 5818 Patentlaan 2
NL - 2280 HV Rijswijk
Tel. (+31-70) 340-2040, Tx. 31 651 epo nl,
Fax: (+31-70) 340-3016

Authorized officer

Edward, V

INTERNATIONAL SEARCH REPORT

Information on patent family members

International Application No

PCT/US 03/37110

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
US 2002035364 A1	21-03-2002	US 6402748 B1	11-06-2002
		US 2004236323 A1	25-11-2004
		AU 756929 B2	30-01-2003
		AU 6225299 A	15-05-2000
		CA 2347949 A1	04-05-2000
		EP 1123057 A1	16-08-2001
		WO 0024329 A1	04-05-2000
		JP 2002528165 T	03-09-2002
US 6338657 B1	15-01-2002	AU 8144501 A	02-05-2002
		CA 2359725 A1	20-04-2002
		DE 60105731 D1	28-10-2004
		EP 1201188 A1	02-05-2002
		ES 2227075 T3	01-04-2005
		JP 2002280119 A	27-09-2002
EP 1293171 A	19-03-2003	US 2003050633 A1	13-03-2003
		US 2003050634 A1	13-03-2003
		EP 1293171 A2	19-03-2003
		US 2004024395 A1	05-02-2004
US 2003078572 A1	24-04-2003	NONE	